


E Series Features & Benefits

Beyond Performance®

The E2-3 unit is the left-side seated alternative in the 5,500 lb range. It can be mounted on the Easy Hitch®, Easy Mount and Moffett mounting systems. The 50 HP Kubota Diesel engine, 31" tires & Anti-Stall Device make it suitable to tackle the roughest terrain. The E2-3 is equipped with Scissor Reach. If the front tires have enough clearance underneath the truck or trailer, it can unload your vehicle from one side. The E2-3 meets or exceeds ANSI B56.6 for rough terrain forklifts.

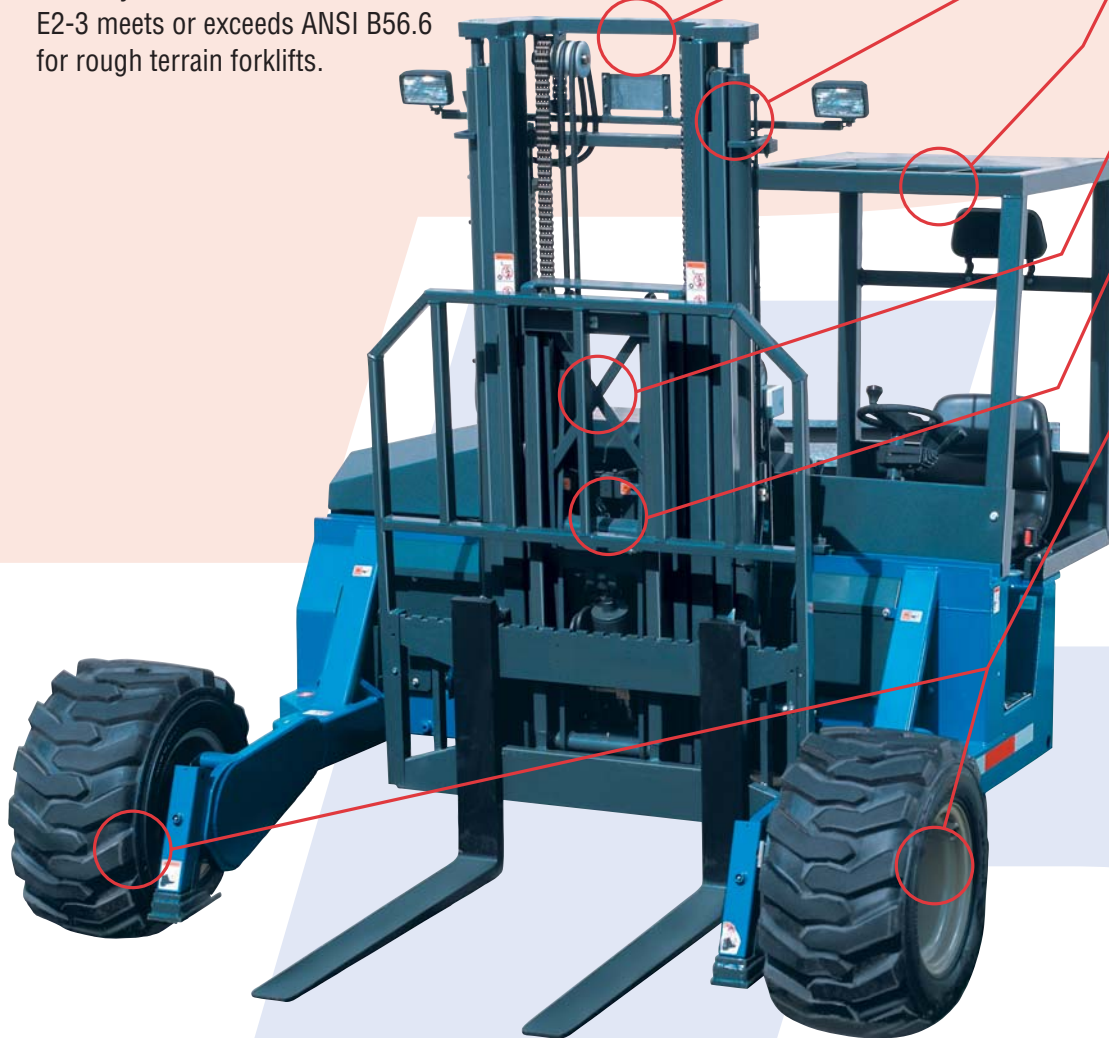

CLEAR VIEW MAST

Provides excellent operator visibility and jobsite safety.

INTEGRATED SIDE-SHIFT MAST

Permits shifting of load left to right.

RUGGED WELDED FRAME

Finished with a sophisticated powder coating system for longer lasting protection.

SCISSOR REACH

Allows operator to unload from one side of the truck in many situations.

NON-RETURN VALVE

Provides extra safety when the unit is mounted or when carrying a load.

THREE-WHEEL DRIVE

Features Trac Loc™ for added traction in soft conditions.

ANSI SPECIFICATIONS

The E-Series meets or exceeds applicable ANSI B56.6 for rough terrain forklifts.

ANTI-STALL HYDRAULIC CONTROL

The Anti-Stall Hydraulic Control System automatically adjusts engine output to meet hydraulic demand. This feature insures maximum hydraulic performance while ensuring the engine cannot stall under load.

* The photographs in this brochure depict a point in time during a particular stage of operation. They are not intended to illustrate proper operation or to serve any instructional purpose and should not be referenced for such purpose.



Arrive



Unhook



Raise up



Lower



Back-up




Drive away




E Series

Technical Specifications

There are over 100 dealer locations throughout the USA. Your local dealer is:



Contact Princeton at 1-800-331-5851 or visit us at www.piggy-back.com.

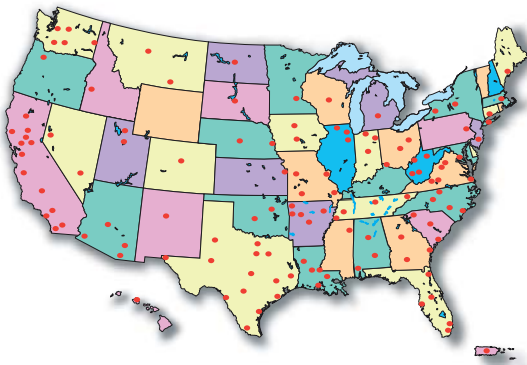

Princeton Delivery Systems Inc.
8170 Dove Parkway
Canal Winchester, Ohio 43110

	E2-3	Options
Load Capacity on 24" load center	5,500 lb	
Engine	Kubota Diesel	
Horsepower	50 HP	
Driven Wheels	3	
Anti Stall Hydraulic Control	Yes	
Front Tires	31"x15.5", pneumatic	Sand Tire
Rear Tire	31"x15.5", pneumatic	Sand Tire
Sealed Tires	Standard	
Speed	5.6 mph	
Gradeability	45%	
Turning Radius	90"	
Weight*	5,400 lb	5,540/5,650 lb
Lift Height	86"	120"/138"
Tilt Forward/Back	7.5/6.5°	
Side Shift	8"	
Height, mast lowered	84"	100"/110"
Reach	Scissors Reach	
Hose Rupture System	Yes	
Seat Belt Interlock	Yes	
Certified Roll Over Protection	Yes	
Hydraulic Support Arms	No	Yes
Mounting System	Easy Hitch®/Easy Mount/Moffett Mount	
Overall Width	101"	
Cargo Bay Width	63"	
Overall Length	116"	
Overhang	74"	86" & 120" only
Length under Truck	36"	
Ground Clearance	15"	
Warranty	1 year	24/36 mo.

* Weight includes mast, forks, full size tires & fluids

Metric Conversion
millimeters = inches x 25.4
kilograms = pounds x .4536



PIGGYBACK®