


**MOUNTING APPLICATION ANALYSIS**

CUSTOMER: \_\_\_\_\_ DATE: \_\_\_\_\_  
 CONTACT: \_\_\_\_\_ PHONE: \_\_\_\_\_ FAX: \_\_\_\_\_  
 PIGGYBACK MODEL: \_\_\_\_\_ MAST: \_\_\_\_\_ REACH: \_\_\_\_\_

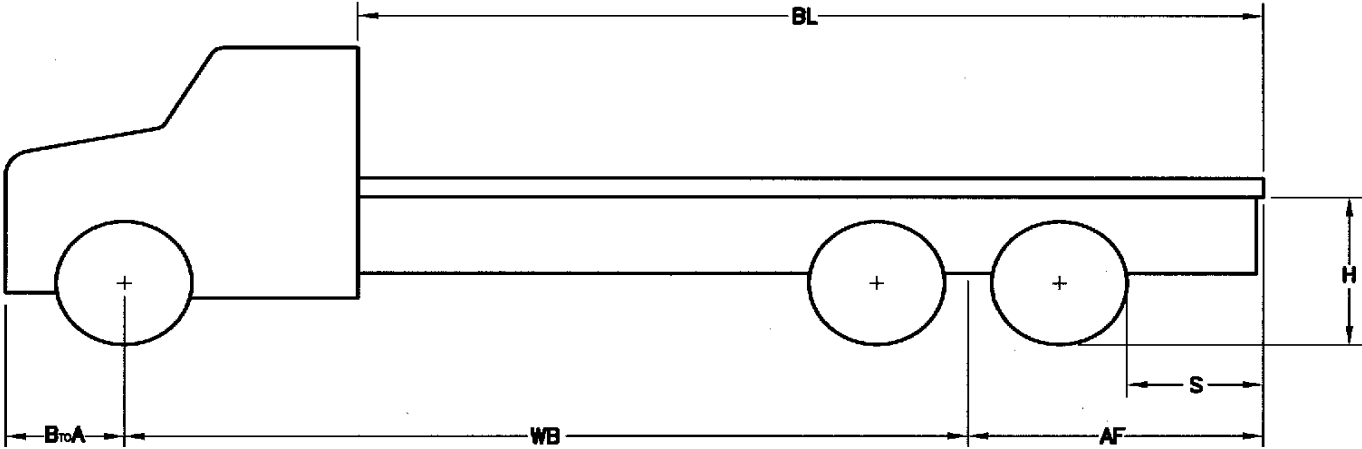

VEHICLE MAKE AND MODEL: \_\_\_\_\_ TRUCK OR TRAILER: \_\_\_\_\_

TANDEM AXLE: \_\_\_\_\_ SINGLE AXLE: \_\_\_\_\_ DUMP BED: \_\_\_\_\_

**DIMENSIONS**

Wheel base of vehicle (WB): \_\_\_\_\_

Centerline of rear axle to end of bed (AF): \_\_\_\_\_

Back of rear tire to end of bed (S): \_\_\_\_\_  
(36" - 48")

Bed Length (BL): \_\_\_\_\_

Distance from bottom of bed to ground (H): \_\_\_\_\_  
(48" Min.)

End of truck frame to end of bed: \_\_\_\_\_

**WEIGHTS**

GVW: \_\_\_\_\_

Front Axle Capacity (FAC): \_\_\_\_\_

Rear Axle Capacity (RAC): \_\_\_\_\_

Curb Weight: \_\_\_\_\_

Front Axle Weight (FAW): \_\_\_\_\_  
(Scale if needed)

Rear Axle Weight (RAW): \_\_\_\_\_  
(Scale if needed)