





PB40

Technical Specifications

There are over 100 dealer locations throughout the USA. Your local dealer is:



Contact Princeton at 1-800-331-5851 or visit us at www.piggy-back.com

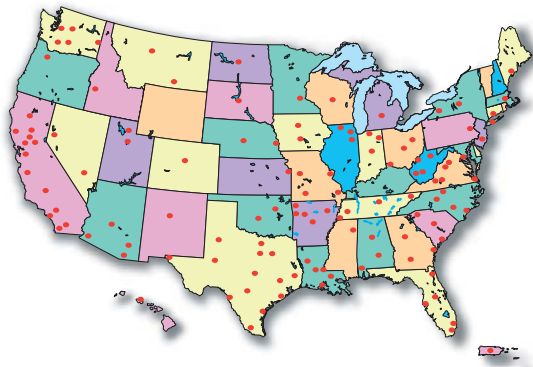

Princeton Delivery Systems Inc.
8170 Dove Parkway
Canal Winchester, Ohio 43110



	PB40	Options
Load Capacity @ 24" load center	4,000 lb	
Engine - Diesel	CAT®, 4 cylinder	
Horsepower	37 HP	
Driven Wheels	2 - Column Steering	
Brakes	Dual, Front	
Tires	29"x12.5", Tractor	Turf Tire
Sealed Tires	Yes	
Speed	10.5 mph	
Gradeability	40+%	
Turning Radius	78"	
Weight*	4,200 lb	
Lift Height	86"	120"
Tilt Forward/Back	8°/8°	
Height, mast lowered	99"	
Reach	Moving Mast	
Seat Belt Interlock	Yes	
Certified Roll Over Protection	Yes	
Mounting System	Easy Hitch®	Moffett Mount
Overall Width	97"	
Cargo Bay Width	64"	
Overall Length	107"	
Overhang	66"	60"
Length under Truck	23"	29"
Ground Clearance	15"	
Warranty	1 year	24/36 months

* Weight includes mast, forks, full size tires & fluids



PIGGYBACK®

PRINCETON
DELIVERY SYSTEMS®



PB40

Product Guide



PB40 Features & Benefits

Beyond Performance®

The PB40 Princeton Piggy Back® Delivery System sets new standards in the industry by implementing time-proven technology into a revolutionary new design. This all-new unit is designed using the latest computer modeling to be lighter and more rugged than any previous Piggy Back we've built. Designed with agricultural markets in mind, this two wheel-drive machine is equipped with a smooth 37 HP CAT® diesel engine, equally smooth hydraulic controls and a tilt-up cab allows for easy access to the engine, pumps and all service filters.

Best terrain & grade capability in its class



CLEAR VIEW MAST
Innovative design enables superior operator view and visibility. Available from 86"-120" lift height.

IMPROVED OPERATOR ROOM
Center seating, a clear view mast and improved ergonomics, developed with the operator in mind.

EASY HITCH® SYSTEM
The unit can be used on both Easy Hitch® and Moffett Mount systems.

HYDRAULICS & BRAKES
Excellent hose, cylinder and wheel motor protection. Dual front brakes are standard.

REVOLUTIONARY DESIGN
Light but strong frame designed by computer modeling. The carriage is staggered for rigidity and effective use of space.

TILT-UP CAB DESIGN
No tools required to raise cab for easy access to engine, pumps, and hydraulic controls.

TIRES
29" x 12.5" sealed pneumatic tires. Optional turf tires.

ANSI SPECIFICATIONS
The PB40 meets or exceeds applicable ANSI B56.6 stability standards for rough terrain forklifts.

Lighter » Faster » Rugged » Agile



Arrive



Unhook



Raise up



Lower



Back-up



Drive away

Easy Hitch® Mounting System:

- Ready to use in less than a minute
- 3 point safety: Hook, Pin & Slack Chain
- Compatible with other Princeton models